



Equipment for the Foodservice Industry

value + quality + service

## Glass Door Merchandiser Freezer

F1-23GDVC



### F1-23GDVC

### Features

#### Features:

- Bottom mount compressor units
- Environmentally friendly R290 refrigerant
- Led lighting interior display system
- Dixell digital temperature control system
- Heavy duty Embraco compressor
- Self-closing and stay open door
- Efficient refrigeration system
- Recessed door handle
- Standard safety door lock
- Magnetic door gaskets
- Pre-installed casters
- Pre-installed shelves


#### Warranty:

- Two year parts and labour; Five years on compressor. *For full warranty details visit <https://www.efifoodequip.com/warranty-info.php>*



**F1-23GDVC**

**Specifications**

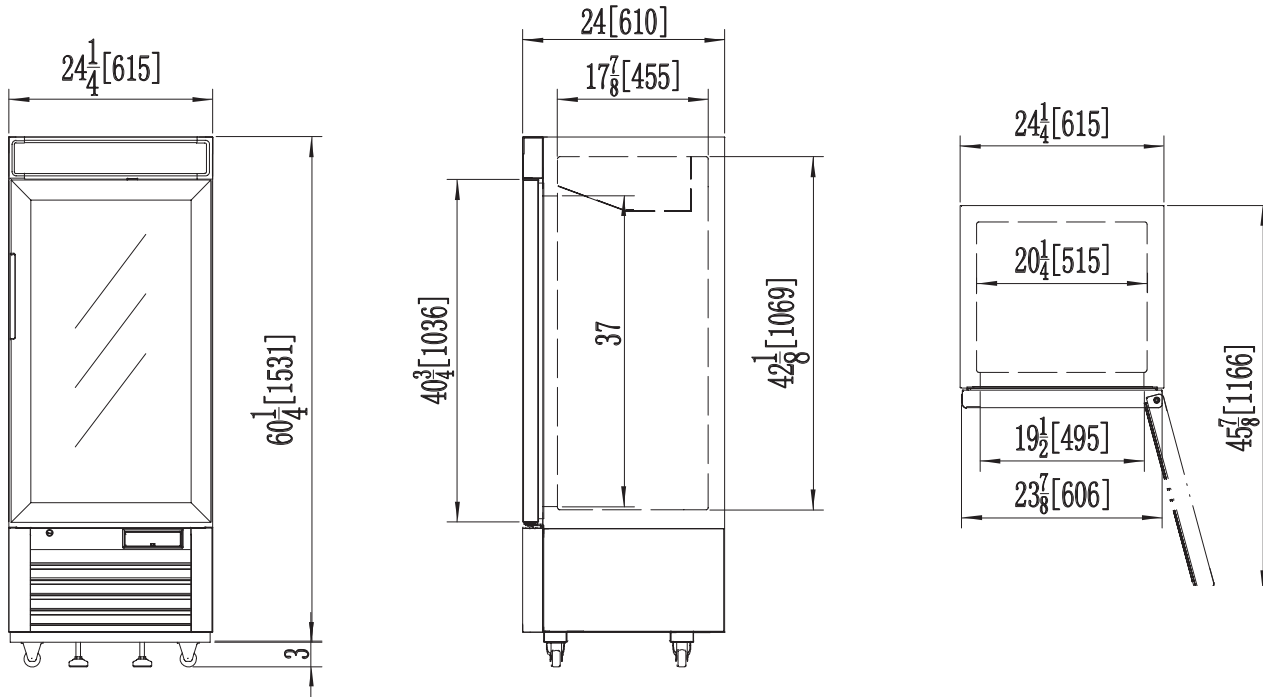

| Model     | Refrigerant | Doors | Shelves | Dimension<br>(mm)<br>(inch) |      |      | HP  | Voltage | Amps | Capacity<br>(L)<br>(Cu Ft.) | Net<br>Weight<br>(KG)<br>(LBS) | Temperature<br>Range |
|-----------|-------------|-------|---------|-----------------------------|------|------|-----|---------|------|-----------------------------|--------------------------------|----------------------|
|           |             |       |         | L                           | D    | H    |     |         |      |                             |                                |                      |
| F1-23GDVC | R290        | 1     | 3       | 615                         | 610  | 1560 | 1/7 | 115/60  | 2.1  | 235                         | 86                             | -20 ~ -18°C          |
|           |             |       |         | 24.2                        | 24.0 | 61.4 |     |         |      | 8.3                         | 189                            | -4 ~ 1°F             |

Equipped with one NEMA 5-15P plug 

**Shipping Information**

| Crate Dimensions<br>(mm)<br>(inch) |      |      | Net Weight<br>(KG)<br>(LBS) | Gross Weight<br>(KG)<br>(LBS) |
|------------------------------------|------|------|-----------------------------|-------------------------------|
| L                                  | D    | H    |                             |                               |
| 668                                | 663  | 1753 | 86                          | 95                            |
| 26.3                               | 26.1 | 69   | 190                         | 210                           |

Specifications subject to change without notice.