



**VERSA
HEAT**

HRG-CV SERIES
RANGES W/ CONVECTION OVEN



HRG24-4B-CV-N/P
HRG36-6B-CV-N/P
HRG60-10B-CV-N/P
24", 36" OR 60" CONVENTION RANGE
W/ 4, 6 OR 10 BURNER TOP
AVAILABLE IN NATURAL GAS OR PROPANE

- Sturdy construction for demanding commercial cooking applications
- User-friendly operation with simple controls
- 30,000 BTU per Top Burner
- Oven thermostat adjusts from 200°F to 500°F (93°C to 232°C)
- NEMA 5-15P 120-volt cord & plug
- Stainless steel front and back riser and lift-off high shelf
- Oven interior side guides & bottom porcelain-coated
- Shipped standard, Natural gas or LP conversion kit included.
- Optional casters available
- Gas pressure regulator is supplied with the unit

WARRANTY:
LIMITED ONE YEAR PARTS
AND LABOUR
SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT
NOTICE.

FIND
ADDITIONAL
BENEFITS
HERE




ADDITIONAL IMAGES



**PRODUCT
DRAWINGS**



**HEAVY DUTY
GRATE**



**MANUAL
CONTROLS**



**COOL TOUCH
EDGE & HANDLE**



LEVELING FEET

MODEL DESIGNATIONS



ADDITIONAL RESOURCES



DIMENSIONS

Code	Dimensions	Width		Depth		Height		Weight	
		Inches	mm	Inches	mm	Inches	mm	Lbs	KG
HRG24-4B-CV-N	Exterior	24.0	609.0	31.4	797.0	60.2	1,530.0	268.4	122.0
HRG24-4B-CV-P	Shipping	27.6	609.0	37.0	930.0	43.7	1,110.0	354.2	161.0
	Oven Cavity	20.0	508.0	22.5	569.0	13.3	336.0		
HRG36-6B-CV-N	Exterior	36.0	914.0	31.4	797.0	60.2	1,530.0	363.0	165.0
HRG36-6B-CV-P	Shipping	39.4	1,000.0	37.0	930.0	43.7	1,110.0	466.4	212.0
	Oven Cavity	26.0	660.0	22.5	569.0	13.3	336.0		
HRG60-10B-CV-N	Exterior	60.0	1,523.0	31.4	797.0	60.2	1,530.0	620.4	282.0
HRG60-10B-CV-P	Shipping	63.0	1,600.0	37.0	930.0	43.7	1,110.0	748.0	340.0
	Oven Cavity	26.0	660.0	22.5	569.0	13.3	336.0		

TECHNICAL

Code	Gas Type	# of Ovens	Racks per Oven	Oven BTU	TEMP RANGE °C	TEMP RANGE °F	# of Burners	Burner BTU per 12"	Total BTU	Volts	Plug	Operating Gas Pressure
HRG24-4B-CV-N	NG	1	1	33000	93.3°C to 260°C	200°F to 500°F	4	30000	153000	12V	NEMA 5-15P	5.0"W.C
HRG24-4B-CV-P	LP	1	1	31000	93.3°C to 260°C	200°F to 500°F	4	26000	136000	12V	NEMA 5-15P	10.0"W.C
HRG36-6B-CV-N	NG	1	1	33000	93.3°C to 260°C	200°F to 500°F	6	30000	213000	12V	NEMA 5-15P	5.0"W.C
HRG36-6B-CV-P	LP	1	1	31000	93.3°C to 260°C	200°F to 500°F	6	28000	190000	12V	NEMA 5-15P	10.0"W.C
HRG60-10B-CV-N	NG	1	1	33000	93.3°C to 260°C	200°F to 500°F	6	30000	213000	12V	NEMA 5-15P	5.0"W.C
HRG60-10B-CV-P	LP	2	1	31000	93.3°C to 260°C	200°F to 500°F	10	28000	326000	12V	NEMA 5-15P	10.0"W.C

LINE DRAWINGS

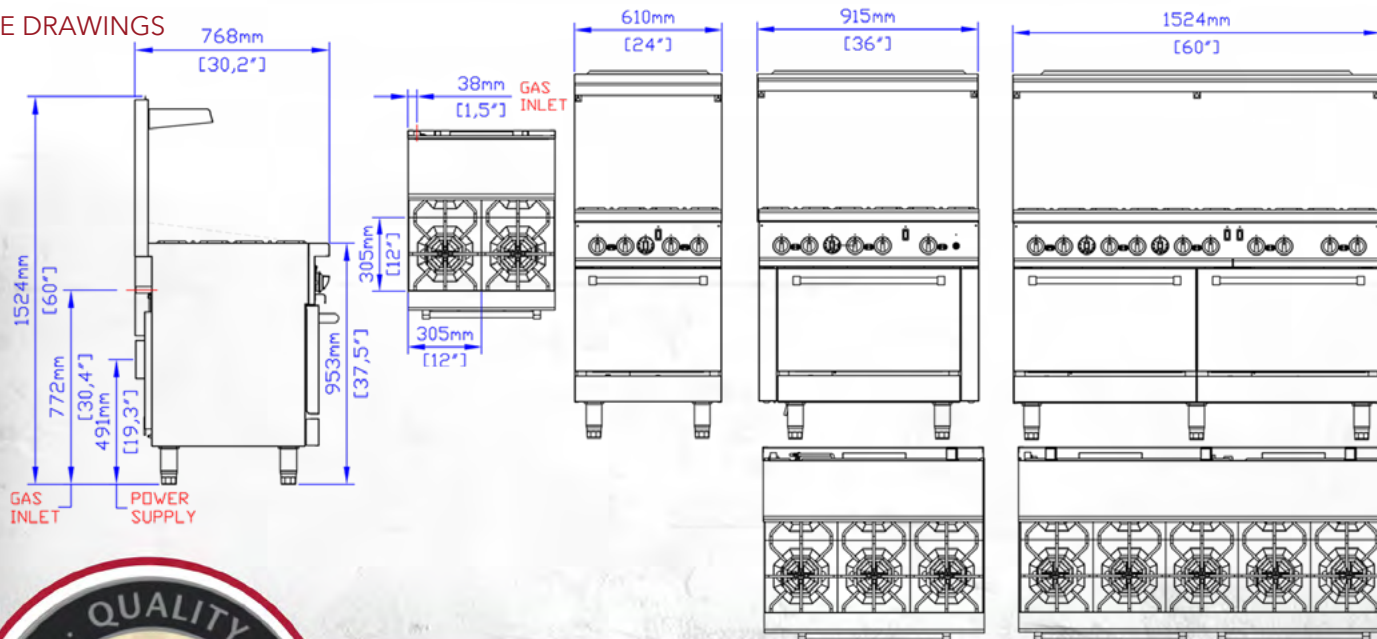

EFI Sales Ltd.
Toronto Office & DC
515 Hanlon Creek Blvd.
Guelph, ON, N1C 0A1

EFI Sales Ltd.
Vancouver Office & DC
26895 Gloucester Way
Langley, BC, V4W 3Y3

(888) 565-9920 Toll Free
(519) 822-1895 Toronto
(604) 607-8850 Vancouver