



**VERSA
HEAT**

HRG-ELC 24 SERIES ELECTRIC 24" RANGES



HRG24-12GM-2B-ELC

HRG24-12GM-2B-ELC

HRG24-24GM-ELC

HRG24-4B-ELC

**24" ELECTRIC RANGE W/ 2 OR 4 BURNERS
AND/OR 12" OR 24" MANUAL GRIDDLE**

- Electro-mechanical heavy-duty oven thermostat (150°F/66°C to 550°F/288°C)
- Tubular heating elements, infinite switch controlled
- Full-width pull-out stainless steel crumb tray
- Oven interior side guides & bottom porcelain-coated
- Stainless steel front and back riser and lift-off high shelf
- Stainless Steel exterior with 10" (254mm) high stainless-steel backsplash
- Cool-touch oven door handle
- Removeable, 3-position, rack guides w/1 oven rack
- 6" (152 mm) stainless steel legs are adjustable
- Also available in a 36" width version
- Requires 208 volt / 3-phase power supply
- Round plates are 9" (229mm) in diameter for maximum pan contact
- Caster sets available: **HA-CAST-RANGE**

FIND
ADDITIONAL
BENEFITS
HERE



WARRANTY:
LIMITED ONE YEAR PARTS
AND LABOUR
SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT
NOTICE.


ADDITIONAL IMAGES



MODEL DESIGNATIONS



ADDITIONAL RESOURCES




DIMENSIONS

Code	Dimensions	Width		Depth		Height		Weight	
		Inches	mm	Inches	mm	Inches	mm	Lbs	KG
HRG24-12GM-2B-ELC	Exterior	24.0	610.0	30.8	782.0	59.1	1,500.0	305.8	139.0
	Shipping	27.6	700.0	36.6	930.0	46.9	1,190.0	391.6	178.0
	Oven Cavity	20.0	508.0	22.4	569.0	13.8	351.0		
HRG24-24GM-ELC	Exterior	24.0	610.0	30.8	782.0	59.1	1,500.0	314.6	143.0
	Shipping	27.6	700.0	36.6	930.0	46.9	1,190.0	391.6	178.0
	Oven Cavity	20.0	508.0	22.4	569.0	13.8	351.0		
HRG24-4B-ELC	Exterior	24.0	610.0	30.8	782.0	59.1	1,500.0	226.6	103.0
	Shipping	27.6	700.0	36.6	930.0	43.7	1,110.0	312.4	142.0
	Oven Cavity	20.0	508.0	22.4	569.0	13.8	351.0		

TECHNICAL

Code	Ovens & Racks	Oven Watts	TEMP RANGE °C	TEMP RANGE °F	Total Amps	Broiler Watts	Griddle Width	Griddle Watts / 12"	# of Burner	Watts per Burner	Voltage	Plug
HRG24-12GM-2B-ELC	1	5 kW	66°C to 288°C	150°F to 550°F	25A	1.25kW	12"	4 kW	2	2 kW	208V/3P	Hard Wired
HRG24-24GM-ELC	1	5 kW	66°C to 288°C	150°F to 550°F	25A	1.25kW	24"	4 kW	-	-	208V/3P	Hard Wired
HRG24-4B-ELC	1	5 kW	66°C to 288°C	150°F to 550°F	25A	1.25kW	-	-	4	2 kW	208V/3P	Hard Wired

LINE DRAWINGS

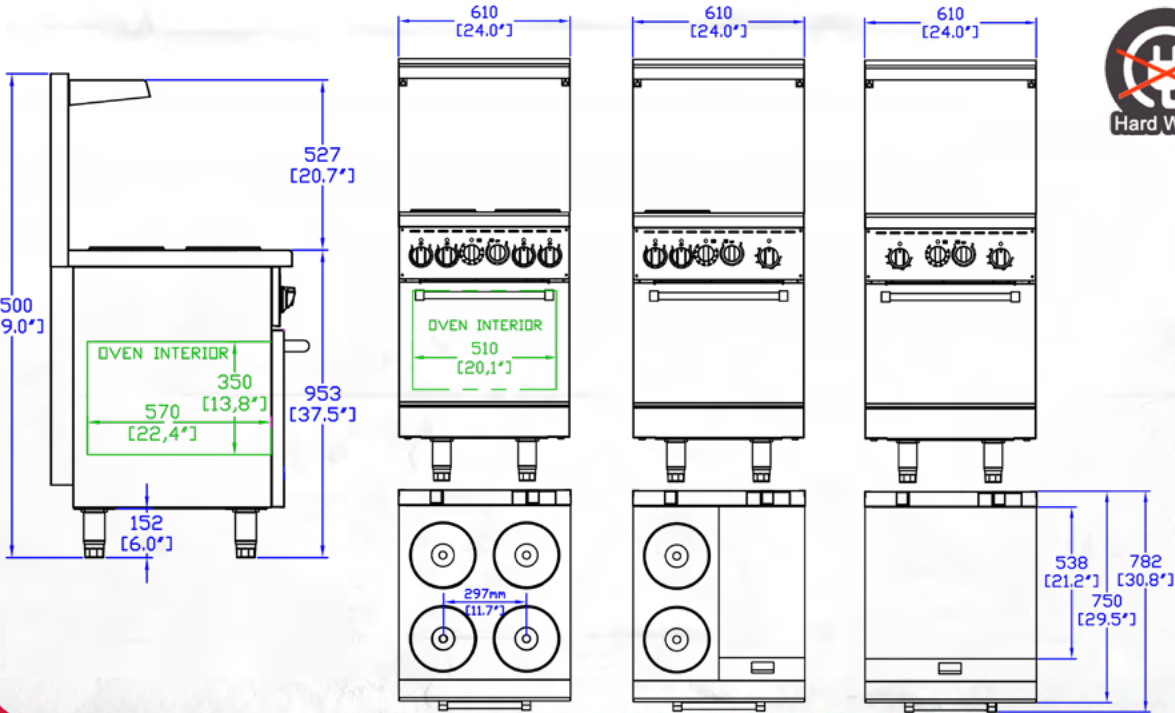

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE



PRODUCT
DRAWINGS



EFI Sales Ltd.
Toronto Office & DC
515 Hanlon Creek Blvd.
Guelph, ON, N1C 0A1

EFI Sales Ltd.
Vancouver Office & DC
26895 Gloucester Way
Langley, BC, V4W 3Y3

(888) 565-9920 Toll Free
(519) 822-1895 Toronto
(604) 607-8850 Vancouver