



**VERSA
HEAT**

HRG60 SERIES 60" GAS RANGES

FIND
ADDITIONAL
BENEFITS
HERE



WARRANTY:
LIMITED ONE YEAR PARTS
AND LABOUR
SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT
NOTICE.

HRG60-10B HRG60-24CH-6B HRG60-24GM-6B HRG60-24GT-6B

**60" RANGE W/ 6 OR 10 BURNERS,
24" CHARBOILER AND/OR
24" MANUAL OR THERMO GRIDDLE
AVAILABLE IN NATURAL GAS OR PROPANE**



HRG60-24GM-6B

- Sturdy construction for demanding commercial cooking applications
- User-friendly operation with simple controls
- Multiple function combinations: Griddle (Manual/Thermostat control), Charbroiler, & Hot plate on top with a Static oven(s), on the bottom
- 30,000 BTU per Top burner
- 35,000 BTU per Charbroiler at 12"
- 30,000 BTU per Manual or Thermostat Griddle at 12"
- 33,000 BTU per Static oven
- Oven thermostat adjusts from 200°F to 500°F (93°C to 232°C)
- Stainless steel front and back riser and lift-off high shelf
- Oven interior side guides & bottom porcelain-coated
- Shipped standard, Natural gas or LP conversion kit included.
- Optional casters available
- Gas pressure regulator is supplied with the unit
- Gas hose kit available: **SIF-HG-4D-48SEL**
- Casters sets available: **CA-CAST-RANGE**

ADDITIONAL IMAGES



MODEL DESIGNATIONS



ADDITIONAL RESOURCES



TECHNICAL

Code	Gas Type	# of Ovens	Racks per Oven	Oven BTU	TEMP RANGE °C	TEMP RANGE °F	TOTAL UNIT BTU	Operating Gas Pressure
HRG60-10B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	366000	5.0" W.C
HRG60-10B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	326000	10.0" W.C
HRG60-24CH-6B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	316000	5.0" W.C
HRG60-24CH-6B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	288000	10.0" W.C
HRG60-24GM-6B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	316000	5.0" W.C
HRG60-24GM-6B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	272000	10.0" W.C
HRG60-24GT-6B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	306000	5.0" W.C
HRG60-24GT-6B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	272000	10.0" W.C


Code	# of Burners	Burner BTU per 12"	Total Burner BTU	Charboiler Width	Charboiler BTU per 12"	Total Charboiler BTU	Griddle Width	Griddle BTU per 12"	Total Griddle BTU
HRG60-10B-N	-	30000	300000	-	-	-	-	-	-
HRG60-10B-P	-	30000	300000	-	-	-	-	-	-
HRG60-24CH-6B-N	-	30000	180000	24"	35000	70000	-	-	-
HRG60-24CH-6B-P	-	30000	180000	24"	35000	70000	-	-	-
HRG60-24GM-6B-N	60000	30000	180000	-	-	-	24"	30000	60000
HRG60-24GM-6B-P	60000	30000	180000	-	-	-	24"	30000	60000
HRG60-24GT-6B-N	60000	30000	180000	-	-	-	24"	30000	60000
HRG60-24GT-6B-P	60000	30000	180000	-	-	-	24"	30000	60000



DIMENSIONS

Code	Dimensions	Width		Depth		Height		Weight	
		Inches	mm	Inches	mm	Inches	mm	Lbs	KG
HRG60-10B-N	Exterior	60.0	1,523.0	31.4	797.0	60.2	1,530.0	620.4	282.0
HRG60-10B-P	Shipping	65.0	1,523.0	37.0	940.0	44.1	1,120.0	748.0	340.0
	Oven Cavity	26.0	660.4	22.5	571.5	13.3	338.0		
HRG60-24CH-6B-N	Exterior	60.0	1,523.0	31.4	797.0	60.2	1,530.0	635.8	289.0
HRG60-24CH-6B-P	Shipping	65.0	1,650.0	37.0	940.0	46.5	1,180.0	772.2	351.0
	Oven Cavity	26.0	660.4	22.5	571.5	13.3	338.0		
HRG60-24GM-6B-N	Exterior	60.0	1,523.0	31.4	797.0	60.2	1,530.0	673.2	306.0
HRG60-24GM-6B-P	Shipping	65.0	1,650.0	37.0	940.0	46.5	1,180.0	816.2	371.0
	Oven Cavity	26.0	660.4	22.5	571.5	13.3	338.0		
HRG60-24GT-6B-N	Exterior	60.0	1,523.0	31.4	797.0	60.2	1,530.0	708.4	322.0
HRG60-24GT-6B-P	Shipping	65.0	1,650.0	37.0	940.0	46.5	1,180.0	862.4	392.0
	Oven Cavity	26.0	660.4	22.5	571.5	13.3	338.0		

LINE DRAWINGS

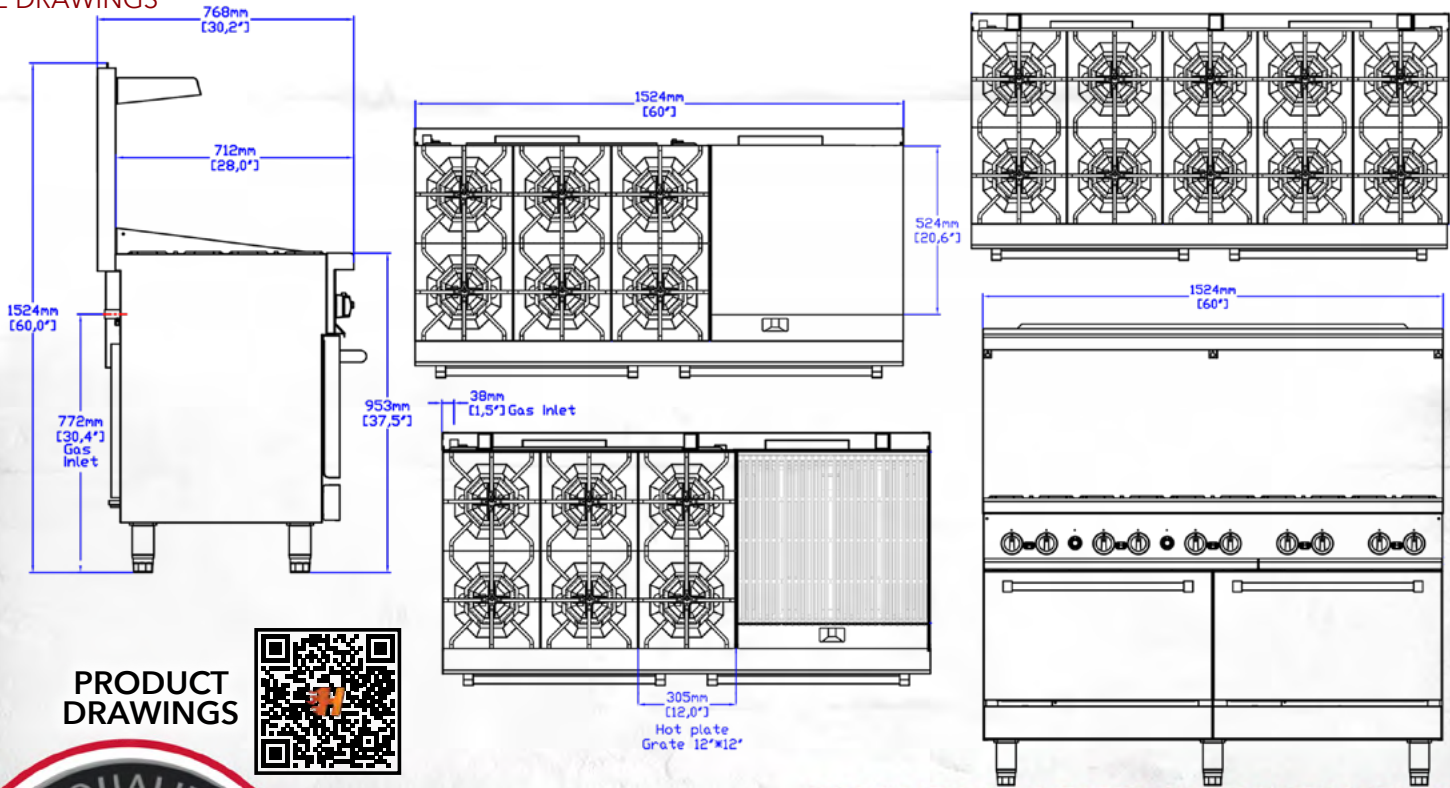

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE



EFI Sales Ltd.
Toronto Office & DC
515 Hanlon Creek Blvd.
Guelph, ON, N1C 0A1

EFI Sales Ltd.
Vancouver Office & DC
26895 Gloucester Way
Langley, BC, V4W 3Y3

(888) 565-9920 Toll Free
(519) 822-1895 Toronto
(604) 607-8850 Vancouver